



INTEX



NEW BEE RATING

— INTRODUCING —

SRAC123I (1 TON INVERTER AC)
ENGINEERED FOR COMFORT. DESIGNED FOR YOU.







BEE STAR RATING 2026 – AIR CONDITIONERS

The updated BEE Star Rating confirms that the product meets the latest energy efficiency benchmarks and is suitable for customer as per current BEE regulations.

All INTEX ACs now have the latest BEE (Bureau of Energy Efficiency) ratings based on energy efficiency, measured using ISEER values.

| BEFORE | AFTER |
|------------|--------------|
| Old 5 Star | → New 4 Star |
| Old 4 Star | → New 3 Star |
| Old 3 Star | → New 2 Star |

Overview of new energy efficiency norms implemented from 1st Jan 2026 in India.





FROST SELF-CLEAN WITH ONE CLICK



DIRT BUILD-UP

Dirty indoor evaporators breed mould, bacteria, and unpleasant odours, negatively impacting indoor air quality.



FROST SELF-CLEAN

Intex GoodAir Frost Self-Clean technology deep cleans the indoor unit in just 15-20 minutes with the press of a button.



CLEAR & FRESH

99.9% cleaner air and up to 30% better efficiency.





7-IN-1 CONVERTIBLE CUSTOMIZABLE POWER MODE



45%



55%



70%



80%



90%



Full
Capacity



High
Capacity



LOW OCCUPANCY



MEDIUM OCCUPANCY



HIGH OCCUPANCY




INTEX



PM 2.5 FILTER


CLEANER AIR FOR HEALTHIER LIVING

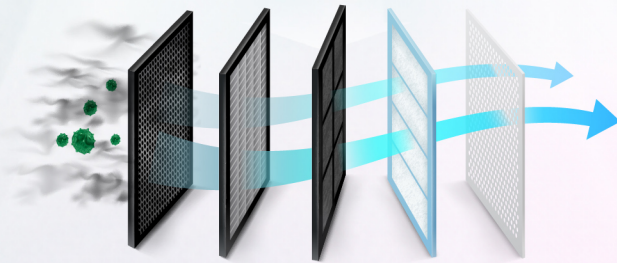

EXTREME HEAT, MET WITH
EXTREME COOL



COOLS EVEN AT
54° IN SUMMERS

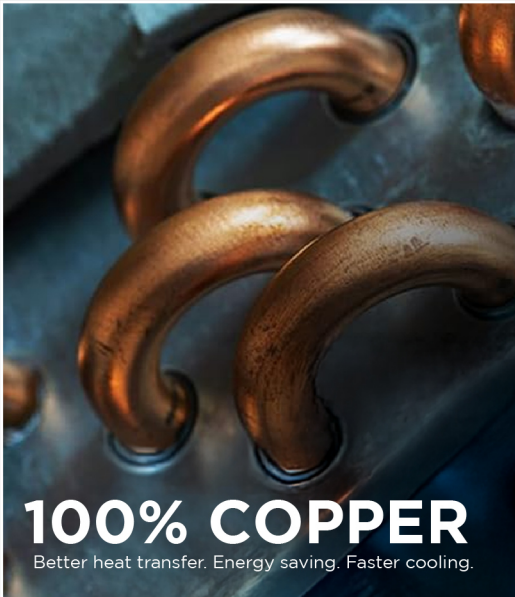

100% COPPER

Better heat transfer. Energy saving. Faster cooling.




3D AIRFLOW

Uniform Comfort Everywhere.

180°



ECO-FRIENDLY REFRIGERANT

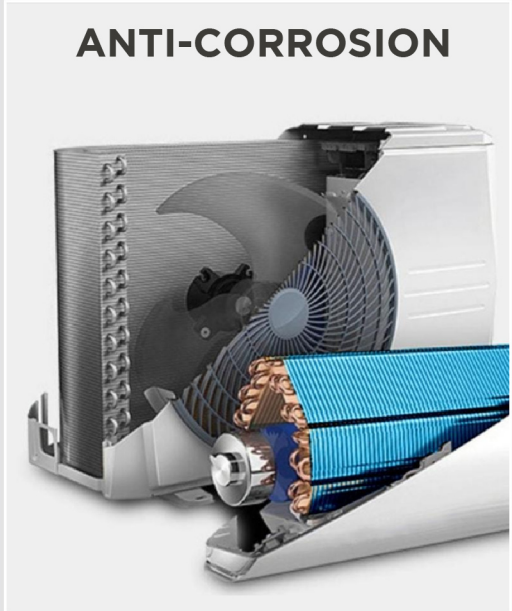

ANTI-CORROSION

INTEX



60 SEC. AUTO CLOSE TIMER
For Coiling Safety and Moisture Releasing.



SLEEP MODE


With soft-touch remote control operations.



INTEX

INBUILT BLDC MOTOR

Silent Cooling | Low Power Consumption

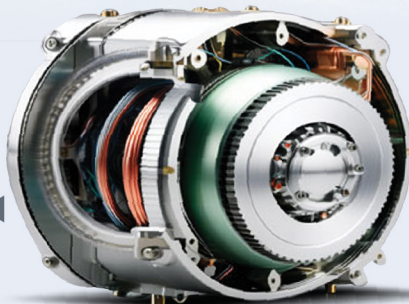

INBUILT
BLDC MOTOR



SUMMER CHILL OPTION

Delivers turbo airflow and instant cooling for immediate comfort.



Product Dimensions (L x W x H) IDU: 810 x 268 x 218 mm



Product Dimensions (L x W x H) ODU: 785 x 280 x 494 mm





| | |
|---|-----------------------|
| Ton | 1 Ton |
| Cooling Capacity | 3450 W |
| BEE Star Rating | 3 STAR |
| Power Requirement | AC 230 V, 50 Hz |
| Condenser Coil | 100 % Copper |
| Self-Clean | YES |
| Auto Swing (2 Way) | YES |
| Convertible Mode | 7-in-1 Convertible |
| IDU Size | 810 mm |
| ODU Size | 18" |
| Product Dimensions (L x W x H) IDU | 810 x 268 x 218 mm |
| Product Dimensions (L x W x H) ODU | 785 x 280 x 494 mm |
| BLDC IDU | Yes |
| BLDC ODU | Yes |
| Indoor Air Flow | 700 m ³ /h |
| Cooling Capacity (Half/Full/Max) | 1725/3450/3622 |
| Applicable for Room Size (sqft) | 90 to 110 |

100% COPPER COIL

7-IN-1 CONVERTIBLE

BLDC MOTOR

PM 2.5 FILTER

FROST SELF CLEAN

POWER CHILL OPTION

ECO SAVING MODE

TURBO MODE

EFFECTIVE R32 REFRIGERANT

SLEEP MODE

SILENT COOLING SYSTEM

LOW NOISE LEVEL

POWERCHILL OPTION

PM2.5

MRP
₹65,999.00/-
 (Inclusive of all taxes)

INTEX



Scan and Discover
World-Class Products
from Intex

Regd. Office: A-61, Okhla Industrial Area, Phase-II, New Delhi-110020
500+ Service Touch Points | Website: www.intex.in | Email: info@intex.in
Customer Care No. : 0120-489-5555



@intextechnologies



@IntexBrand



@IntexIndia



@IntexTechnologies