



INTEX



NEW BEE RATING

INTRODUCING  
**SRAC183I (1.5 TON INVERTER AC)**  
SMART COOLING FOR MODERN HOMES.






## BEE STAR RATING 2026 – AIR CONDITIONERS

The updated BEE Star Rating confirms that the product meets the latest energy efficiency benchmarks and is suitable for customer as per current BEE regulations.

All INTEX ACs now have the latest BEE (Bureau of Energy Efficiency) ratings based on energy efficiency, measured using ISEER values.

BEFORE	AFTER
Old 5 Star	→ New 4 Star
Old 4 Star	→ New 3 Star
Old 3 Star	→ New 2 Star



Overview of new energy efficiency norms implemented from 1st Jan 2026 in India.






## FROST SELF-CLEAN WITH ONE CLICK



### DIRT BUILD-UP

Dirty indoor evaporators breed mould, bacteria, and unpleasant odours, negatively impacting indoor air quality.



### FROST SELF-CLEAN

Intex GoodAir Frost Self-Clean technology deep cleans the indoor unit in just 15-20 minutes with the press of a button.



### CLEAR & FRESH

99.9% cleaner air and up to 30% better efficiency.



INTEX



## 7-IN-1 CONVERTIBLE CUSTOMIZABLE POWER MODE



LOW OCCUPANCY



MEDIUM OCCUPANCY



HIGH OCCUPANCY




INTEX



## PM 2.5 FILTER

CLEANER AIR FOR HEALTHIER LIVING.

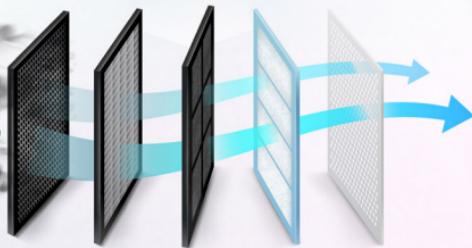

EXTREME HEAT, MET WITH  
**EXTREME COOL**



COOLS EVEN AT  
54° IN SUMMERS




**3D AIRFLOW**  
Uniform Comfort Everywhere.



**ECO-FRIENDLY  
REFRIGERANT** R32



**ANTI-CORROSION**

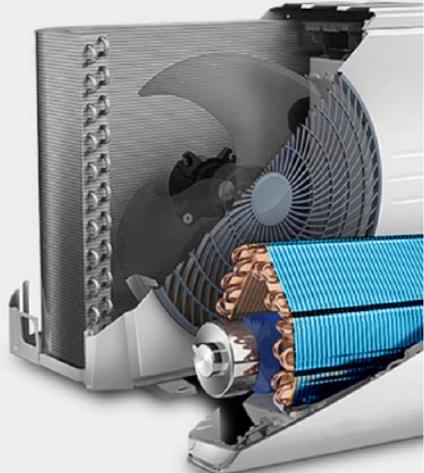

INTEX



**60 SEC. AUTO CLOSE TIMER**  
For Coiling Safety and Moisture Releasing.



## SLEEP MODE

With soft-touch remote control operations.



INTEX

# INBUILT BLDC MOTOR

Silent Cooling | Low Power Consumption



INBUILT  
BLDC MOTOR

INTEX



## SUMMER CHILL OPTION

Delivers turbo airflow and instant cooling  
for immediate comfort.



**INTEX**

Product Dimensions (L x W x H) IDU: 920 x 315 x 235 mm



Product Dimensions (L x W x H) ODU: 835 x 297 x 560 mm





Ton	1.5 TON
Cooling Capacity	5100 W
BEE Star Rating	3 STAR
Power Requirement	AC 230 V, 50 Hz
Condenser Coil	100 % Copper
Self-Clean	YES
Auto Swing (2 Way)	YES
Convertible Mode	7-in-1 Convertible
IDU Size	920 mm
ODU Size	20"
Product Dimensions (L x W x H) IDU	920 x 315 x 235 mm
Product Dimensions (L x W x H) ODU	835 x 297 x 560 mm
BLDC IDU	Yes
BLDC ODU	Yes
Indoor Air Flow	1050 m <sup>3</sup> /h
Cooling Capacity (Half/Full/Max)	2550/5100/5355
Applicable for Room Size (sqft)	120 to 150



MRP

₹73,999.00/-

(Inclusive of all taxes)

INTEX



Regd. Office: A-61, Okhla Industrial Area, Phase-II, New Delhi-110020  
500+ Service Touch Points | Website: [www.intex.in](http://www.intex.in) | Email: [info@intex.in](mailto:info@intex.in)  
Customer Care No. : 0120-489-5555



@intextechnologies



@IntexBrand



@IntexIndia



@IntexTechnologies