


CLOUD-BASED ATTENDANCE & ACCESS CONTROL SOFTWARE

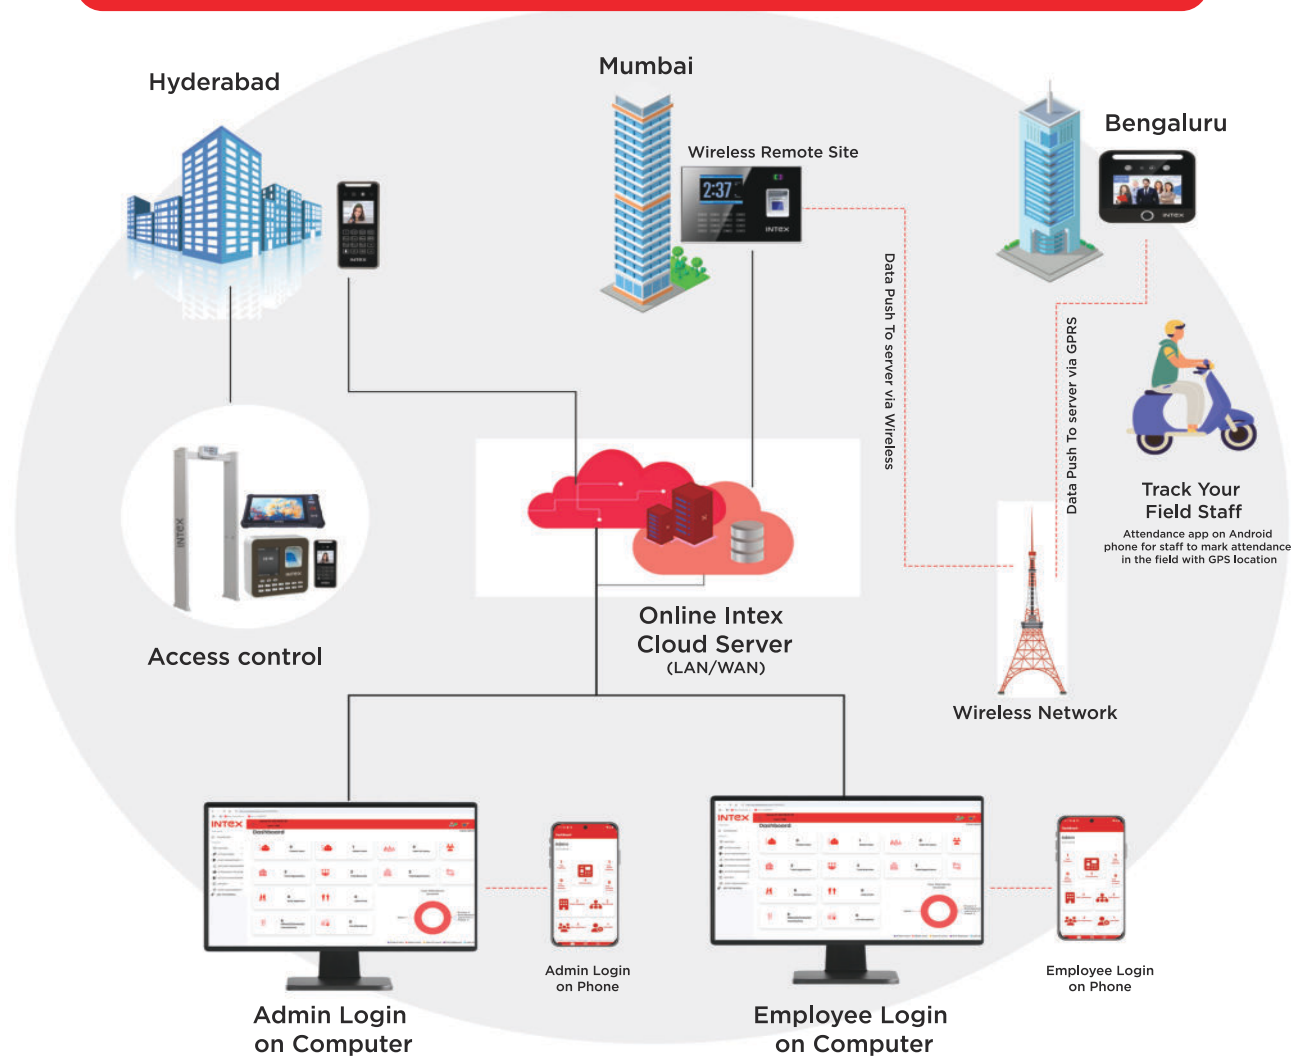

AADHAAR FACE RECOGNITION SYSTEM

INTEX UID FACE
AADHAAR ENABLE

STQC
Certification

AADHAAR

Bluetooth

TCP/IP

4G/5G

USB
Output

BIS Approved
Product

USB
TYPE-C



18K+ Pincode Covering | **500+** Distributors | **25K+** Dealers | **11** Warehouses | **500+** Authorised Service Partners

INTEX

INTEX TECHNOLOGIES (INDIA) LTD.

Regd. Office: A-61, Okhla Industrial Area, Phase-II, New Delhi-110020
500+ Service Touch Points | www.intex.in | Email: enquiryss@intex.in | Customer Care No.: 0120-489-5555

Book a demo with Intex or call us at:
+91 9355596673

CATEGORY RANGE

CONSUMER DURABLES | SPEAKERS | IT ACCESSORIES | LIFESTYLE ELECTRONICS | IFPD & DISPLAY SOLUTIONS

@intextechnologies | @IntexBrand | @IntexIndia | @IntexTechnologies

Due to regular updation of the product, the picture and specifications on catalogue might differ from the actual product



INTEX

INTEGRATED INTELLIGENCE

SECURITY & BIOMETRIC DEVICES FOR MODERN SOCIETY





PRODUCT CATALOGUE



MK/S&S BROCHURE/1000/AUGUST-25

FINGERPRINT			
			
INTEX TIME ACCESS	INTEX ACCESS ONE	INTEX AX 3K	INTEX B3
 1000 Fingerprints  1000 Cards  1000 Passwords  Access Control  100,000 Records  USB Output  Excel Output	 500 Fingerprints  500 Cards  500 Passwords  Access Control  100,000 Records  USB Output	 3000 Fingerprints  3000 Cards  3000 Passwords  Access Control  100,000 Records  USB Output	 1000 Fingerprints  1000 Cards  1000 Passwords  Access Control  100,000 Records  USB Output  Battery Backup
LCD Size: 2.4" TFT Color LCD	Size: 86 × 86 × 30 mm	LCD Size: 2.4" TFT Color LCD	LCD Size: 2.4" TFT Color LCD
Identification Speed: < 0.8 sec	Identification Speed: < 1 sec	Identification Speed: < 1 sec	Identification Speed: < 0.8 sec
Working Voltage: 5V	Power Supply: DC 12V	Power Supply: DC 12V/1A	Working Voltage: 9V/12V
Voice Prompt: Late arrival or early departure	Voice: Boom, Dual LED	Voice: Boom, Dual LED	Inbuilt Bell: Setting Bell

FACE RECOGNITION			
			
INTEX AI CUBE PLUS	INTEX SMART ACCESS	INTEX AI CUBE	INTEX UID FINGER
 5000 Faces  5000 Cards  5000 Passwords  Access Control  100,000 Records  10000 Fingerprints	 5000 Faces  5000 Cards  5000 Passwords  Access Control  100,000 Records	 5000 Faces  5000 Cards  5000 Passwords  Access Control  100,000 Records  10000 Fingerprints	 STQC Certification  Bluetooth  TCP/IP  4G/5G  AADHAAR  USB Output  BIS Approved Product  USB Type-C
DISPLAY: 5-inch HD IPS Touch Screen, Resolution 1280 × 720	DISPLAY: 2.8-inch Color Screen	DISPLAY: 4.3-inch Touch Screen	DISPLAY: 7-inch Touch Screen
			
INTEX AIR 5	INTEX AI PRO	INTEX UID FACE	INTEX T4D CONTROLLER
 5000 Faces  5000 Cards  5000 Passwords  Access Control  100,000 Records  10000 Fingerprints	 5000 Faces  5000 Cards  5000 Passwords  Access Control  100,000 Records  10000 Fingerprints	 STQC Certification  Bluetooth  TCP/IP  4G/5G  AADHAAR  USB Output  BIS Approved Product  USB Type-C	 Working Mode Offline / Online  EM Cards  TCP/IP Model  Access Control  RS232/485  Card
DISPLAY: 4.3-inch Touch Screen	DISPLAY: 4.3-inch Touch Screen	DISPLAY: 8.5-inch Touch Screen	Control: 4 Doors

CAMERA			
			
INTEX AHD DOME 2.4MP	INTEX AHD BULLET 2.4MP	INTEX AHD DOME 5MP	INTEX AHD BULLET 5MP
 Resolution  Day/Night  DWDR  Mic & Speaker Audio/Alarm  Full HD  Multiple Screens	 Resolution  Day/Night  DWDR  Mic & Speaker Audio/Alarm  Full HD  Multiple Screens	 Resolution  Day/Night  DWDR  Mic & Speaker Audio/Alarm  Full HD  Multiple Screens	 Resolution  Day/Night  DWDR  Mic & Speaker Audio/Alarm  Full HD  Multiple Screens
Supports Built-in Mic	Supports Built-in Mic	Supports Built-in Mic, Smart IR	Supports Built-in Mic, Smart IR
4 Signals Over 1 Coaxial Cable	4 Signals Over 1 Coaxial Cable	4 Signals Over 1 Coaxial Cable	4 Signals Over 1 Coaxial Cable
3.6 mm Fixed Lens (2.8 mm Optional)	3.6 mm Fixed Lens (2.8 mm Optional)	3.6 mm Fixed Lens	3.6 mm Fixed Lens
			
INTEX IP 4MP DOME	INTEX IP 4MP BULLET	INTEX IP 5MP DOME	INTEX IP 5MP BULLET
 Resolution  Day/Night  DWDR  Mic & Speaker Audio/Alarm  Full HD  Multiple Screens	 Resolution  Day/Night  DWDR  Mic & Speaker Audio/Alarm  Full HD  Multiple Screens	 Resolution  Day/Night  DWDR  Mic & Speaker Audio/Alarm  Full HD  Multiple Screens	 Resolution  Day/Night  DWDR  Mic & Speaker Audio/Alarm  Full HD  Multiple Screens
Supports Built-in Mic	Supports Built-in Mic	Supports Built-in Mic, Smart IR	Supports Built-in Mic, Smart IR
IR Range of 30 Mtr.	IR Range of 30 Mtr.	4 Signals over 1 Coaxial Cable	4 Signals over 1 Coaxial Cable
3.6 mm Fixed Lens	3.6 mm Fixed Lens	3.6 mm Fixed Lens	3.6 mm Fixed Lens
			
INTEX IP 5MP DOME PRO	INTEX IP 5MP BULLET PRO	INTEX DVR	INTEX NVR
 Resolution  Day/Night  DWDR  Mic & Speaker Audio/Alarm  Full HD  Multiple Screens	 Resolution  Day/Night  DWDR  Mic & Speaker Audio/Alarm  Full HD  Multiple Screens	 H.265  USB  GUI  H.265  H.265	 H.265  HDMI  GUI  H.265
Supports Built-in Mic	Supports Built-in Mic, Smart IR	Channel- 4CH, 8CH, 16CH	Channel- 10CH, 16CH, 36CH
Supports Full-Channel AI-Instastream	Supports Full-channel AI-Instastream	Supports Full-Channel AI-Instastream	Supports Full-channel AI-Instastream
Supports Built-in Mic	Supports Built-in Mic, Smart IR	Mobile Software	Mobile Software, ONVIF
IR Range of 30 Mtr.	4 Signals over 1 Coaxial Cable	Supports HDCVI/AHD/TVI/CVBS/IP Video Inputs	Supports HDCVI/AHD/TVI/CVBS/IP Video Inputs
3.6 mm Fixed Lens	3.6 mm Fixed Lens	1 HDMI/1 VGA Simultaneous Video Output	1 HDMI/1 VGA Simultaneous Video Output

ACCESSORIES			
			
INTEX POE (4 & 8 PORT)	INTEX POE UPLINK GIGA	INTEX 600 LBS DOUBLE LEAF	INTEX 1200 LBS LOCK
MODELS 4 Port POE Switch 8 Port POE Switch 10/100 Full Duplex & Half Duplex Light Weight & Heat Resistance Switch Capacity 1.2G AI & Surge Protection Metal Housing	MODELS INTEX 8+2 UPLINK GIGA INTEX 8G+2G FULL GIGA INTEX 16CH+2UG+1SFP INTEX 16G+2UG+2SFP (UPLINK GIGA) INTEX 16G+2GE+2SFP (FULL GIGA) AI & Surge Protection, IP-40 Protection Metal Shell	Size: 250x47x26 mm Current: DC12V/450mA Holding Force: 480kg/600LBS Bracket Available: 280ZL/280U Applicable to: Wooden Door, Glass Door, Grill and Gate	Size: 500x47x26 mm Current: DC12V/450mA Holding Force: 960kg/1200LBS Bracket Available: 280ZL/280U Applicable to: Wooden Door, Glass Door, Grill and Gate

					
Push Button	ZL Bracket	U Bracket	L Plate	RFID Card	UHF Card
					
UHF Reader	RFID Reader	Fingerprint Reader	MIFARE Reader	QR Reader	Metal Push Button

ENTRANCE CONTROLS			
			
DFMD	HHMD	BOOM BARRIER	FLAP BARRIER
Single, 6/8/12 Zone DFMD	Safe for Pregnant Women and Pacemakers	DC Barrier with 3 & 6M Boom	Material: 2.0 mm SUS304
Voltage: AC110V-240V 50/60hz	Double Batteries Operated	Voltage: AC220V	Voltage: 100V-240V
Sensitivity: > 10g Metal	Built-in Battery Charger	Boom Type: Telescopic	Pass Rate: 35p/m
Working Humidity: 99%	Automatic Setting (No Adjustments Required)	Motor: BLDC Motor, Power: 120W	3 Sensor Pairs
Mult-Zone Technology	Single Push to ON	Remote Control Distance: 30 Meters	DC Brushless Motor
Detection Sensitivity: 0-400 Levels	Ultra High Sensitivity	Direction: Right Hand/Left Hand Version	Power Supply: 24V 150W
Fault Code Indication Function	Audio, Visual & Vibration Alarm	Working Temperature: 30°C - 80°C	Working Temperature: 30°C - 80°C